




BR700ELCD/BR850ELCD
BR1000ELCD/BR1200ELCD



DESKTOP UPS WITH LCD DISPLAY



The GreenPower UPS with multifunction LCD readout, providing immediate access to power information


Perfect for home and office applications, the BRICS LCD Series is a compact UPS which adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilised AC power output. The products' multifunction LCD readout clearly displays information of power and battery conditions. This series also features a cable collector and wall-mount design, allowing you to maintain a tidy and flexible workspace.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- USB Charging Port
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- PowerPanel Management Software
- Wall Mount Installation

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button
5. Battery Backup & Surge Protected Outlets
6. Surge Protected Outlets
7. Communication Protection Ports RJ11/RJ45
8. USB Charging Port
9. Cable Collector
10. Input Circuit Breaker
11. AC Input Power Cord
12. USB Port

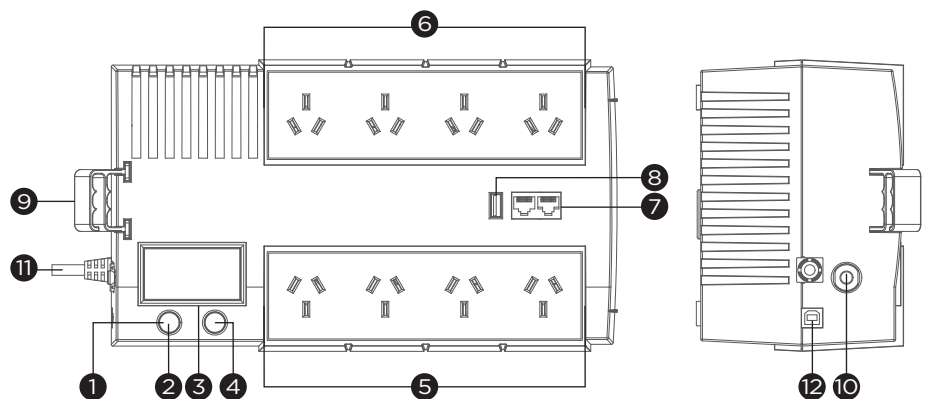

BR700/850/1000/1200ELCD



TECHNICAL SPECIFICATIONS

| Model Name | BR700ELCD | BR850ELCD | BR1000ELCD | BR1200ELCD |
|--|--|-----------|------------|------------|
| General | | | | |
| UPS Topology | Line-interactive | | | |
| Energy Saving Technology | GreenPower UPS™ Bypass Technology | | | |
| Input | | | | |
| Nominal Input Voltage (Vac) | 230 ± 10% | | | |
| Input Voltage Range (Vac) | 170 - 290 | | | |
| Input Frequency (Hz) | 50 ± 5, 60 ± 5 | | | |
| Input Frequency Detection | Auto-sensing | | | |
| Rated Input Current (A) | 3.18 | 3.86 | 4.55 | 5.45 |
| Input Connector Type | AU | | | |
| Output | | | | |
| Capacity (VA) | 700 | 850 | 1000 | 1200 |
| Capacity (Watts) | 420 | 510 | 600 | 720 |
| On Battery Waveform | Simulated Sine Wave | | | |
| On Battery Voltage(s) (Vac) | 230 ± 10% | | | |
| On Battery Frequency (Hz) | 50 ± 1%, 60 ± 1% | | | |
| Automatic Voltage Regulation (AVR) | Single Boost, Single Buck | | | |
| Overload Protection | Circuit Breaker | | | |
| Outlet(s) - Total | 8 | | | |
| Outlet Type | AU x 8 | | | |
| Outlet(s) - Battery & Surge Protected | 4 | | | |
| Outlet(s) - Surge-Only Protected | 4 | | | |
| USB Charging Port(s) | USB-A x 1 | | | |
| USB Charging Current | 5 V/1A | | | |
| Typical Transfer Time (ms) | 4 | | | |
| Battery | | | | |
| Runtime at Half Load (min) | 9 | 8 | 6 | 9 |
| Runtime at Full Load (min) | 1.5 | 1 | 1 | 2 |
| Typical Recharge Time (Hours) | 8 | | | |
| User-replaceable | Yes | | | |
| Battery Type | Sealed Lead-acid | | | |
| Surge Protection & Filtering | | | | |
| Surge Suppression (Joules) | 150 | | | |
| EMI/RFI Filtration | Yes | | | |
| Phone/Network Protection RJ11/RJ45 (Combo) | 1-in, 1-out | | | |
| Management & Communications | | | | |
| LCD Panel | Yes | | | |
| LED Indicators | Power On, Line Mode, Battery Mode, Low Battery | | | |
| HID Compliant USB Port(s) | 1 | | | |
| Audible Alarms | Battery Mode, Low Battery, Overload, UPS Fault | | | |
| Power Management Software | PowerPanel Personal (Recommended) | | | |
| Physical | | | | |
| Form Factor | Desktop | | | |
| Physical Size - UPS Module | | | | |
| Dimensions (WxHxD) (mm.) | 166 x 118 x 288 | | | |
| Weight (kg.) | 5.3 | 6.5 | | 8.2 |
| Environmental | | | | |
| Operating Temperature (°C) | 0 - 40 | | | |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90 | | | |
| Online Thermal Dissipation (BTU/hr) | 71 | 72 | 102 | 137 |
| Certifications | | | | |
| Certifications* | CE, RCM | | | |
| RoHS | Yes | | | |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.

#All specifications are subject to change without notice.